

OBEXION ID A1 INDUSTRIAL DOOR

ACCREDITATIONS

- Independently tested by the Loss Prevention Certification Board (LPCB)
- Certified to LPS 1175 Issue 8, A1 (SR1)
- Secured by Design Police Preferred Specification



CERTIFIED PROTECTION AGAINST:



Forced Entry:
Bodily Force

Mitigation of opportunist intruder attempts using manual or bodily force including tools.

The Obexion ID A1 is an industrial door certified to LPS 1175 Issue 8, A1 (SR1) standard. It is designed to withstand attack by a determined opportunist using bodily force and small, simple tools that may be concealed easily.

It is typically specified for lower risk commercial buildings, warehouses and production facilities but can be used for a large range of industrial applications when optional upgrades such as thermal insulation or acoustic insulation materials are included in the specification.

Obexion ID A1 is also available as a perforated single wall version in steel, giving vision and airflow through the door.

- Aluminium, galvanised steel or stainless steel curtain construction
- Single skin steel curtain construction with full or partial perforation
- Polyester powder coated to any standard RAL/BS colour
- Manual or auto locking
- High or standard duty cycle motors
- Thermal insulation upgrade
- Acoustic insulation upgrade

OBEXION ID A1 INDUSTRIAL DOOR

SUITABLE APPLICATIONS INCLUDE:

- Lower risk commercial buildings
- Warehouses
- Production Facilities

APPROVED DIMENSIONS

Minimum Certified Width: 1000
Maximum Certified Width: 8000
Minimum Certified Height: 1000
Maximum Certified Height: 8000

CURTAIN

Single Wall Aluminium
Single Wall Galvanised Steel
Single Wall Perforated Steel
Double Wall Aluminium
Double Wall Galvanised Steel
Double Wall Stainless Steel

BOTTOM RAIL

Extruded aluminium
Weather seal

OPTIONS

- Galvanised steel offers the option of perforated curtain profile for vision and ventilation.
- Thermal upgrade available
- Acoustic upgrade available
- High wind resistance upgrade available

FINISH


Finish as delivered.
Polyester powder coated in standard RAL/BS colours available as an added option.

PRODUCT REFERENCE

Obexion ID A1 Industrial Door

PERFORMANCE

Certified to LPS 1175 Issue 8 A1 (SR1)

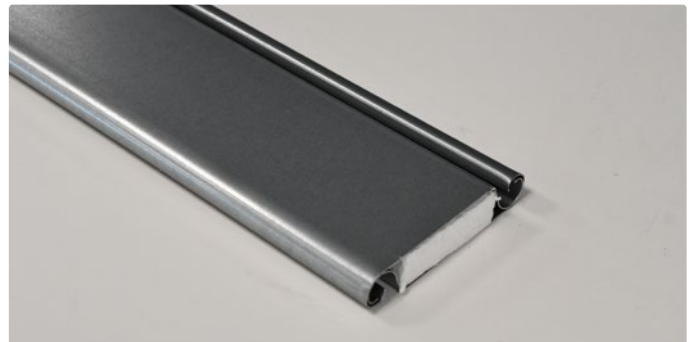

SUITABLE SUBSTRATES:

- Brickwork
- Blockwork
- Concrete
- Structural Steelwork
- Sub assembly steel framework

FRAMES/GUIDES

Two-part galvanised steel guide with rubber seals

OPERATION/LOCKING

Hold-to-run operation with manual locks
Automatic operation with electronic locks
Safety on close as assessment directs

