

OBEXION ID B3 INDUSTRIAL DOOR

ACCREDITATIONS

- Independently tested by the Loss Prevention Certification Board (LPCB)
- Certified to LPS 1175 Issue 8, B3 (SR2)
- Secured by Design Police Preferred Specification



CERTIFIED PROTECTION AGAINST:



Forced Entry:
Bodily Force

Mitigation of opportunist intruder attempts using manual or bodily force including tools.

The Obexion ID B3 is an industrial door certified to LPS 1175 Issue 8, B3 (SR2) standard. It is designed to withstand attack by a determined opportunist, using bodily force and mechanically advanced tools of medium size.

This industrial door is ideal for commercial buildings with a medium security risk, utilities buildings, as well as data and communications centres.

Optional upgrades such as thermal and acoustic insulation can be included in the specification, as well as wind resistance.

Obexion ID B3 is also available as a perforated single wall version in steel, giving vision and airflow through the door.

- Aluminium, galvanised steel or stainless steel curtain construction
- Single skin steel curtain construction with full or partial perforation
- Polyester powder coated to any standard RAL/BS colour
- Manual or auto locking
- High or standard duty cycle motors
- Thermal insulation upgrade
- Acoustic insulation upgrade

OBEXION ID B3 INDUSTRIAL DOOR

SUITABLE APPLICATIONS INCLUDE:

- Medium risk commercial buildings
- Utilities Buildings
- Data centres

APPROVED DIMENSIONS

Minimum Certified Width: 1000
Maximum Certified Width: 8000
Minimum Certified Height: 1000
Maximum Certified Height: 8000

CURTAIN

Single Wall Aluminium
Single Wall Galvanised Steel
Single Wall Perforated Steel*
Double Wall Aluminium
Double Wall Galvanised Steel
Double Wall Stainless Steel

BOTTOM RAIL

Extruded aluminium
Reinforced steel
Weather seal

OPTIONS

- Galvanised steel offers the option of perforated curtain profile for vision and ventilation*
- Thermal upgrade available
- Acoustic upgrade available
- High wind resistance upgrade available

FINISH

Finish as delivered.
Polyester powder coated in standard RAL/BS colours available as an added option.


*Minimum width 2400mm

PRODUCT REFERENCE

Obexion ID B3 Industrial Door

PERFORMANCE

Certified to LPS 1175 Issue 8 B3 (SR2)

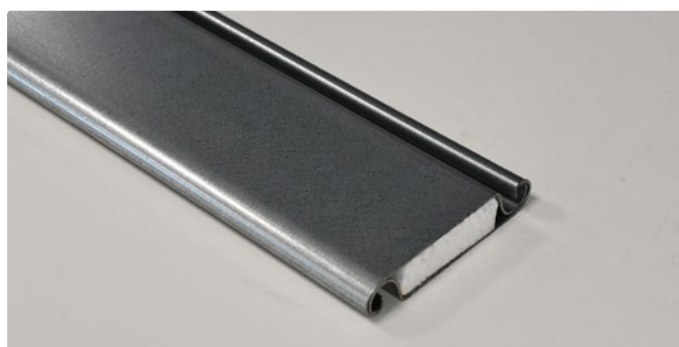

SUITABLE SUBSTRATES:

- Brickwork
- Blockwork
- Concrete
- Structural Steelwork
- Sub assembly steel framework

FRAMES/GUIDES

Two-part galvanised steel guide with rubber seals

OPERATION

Hold-to-run operation with manual locks
Automatic operation with electronic locks
Safety on close as assessment directs

