

OBEXION ID E10 INDUSTRIAL DOOR

ACCREDITATIONS

- Independently tested by the Loss Prevention Certification Board (LPCB)
- Certified to LPS 1175 Issue 8, E10 (SR5)
- Secured by Design Police Preferred Specification



CERTIFIED PROTECTION AGAINST:



Forced Entry:
Bodily Force

Mitigation of opportunist intruder attempts using manual or bodily force including tools.



Forced Entry:
Power Tools

Protecting against deliberate forced entry of premises using mechanically-enhanced power tools.



Bespoke

Securing people, property and assets against bespoke risks and severe threats.

The Obexion ID E10 is an industrial door certified to LPS 1175 Issue 8, E10 (SR5) standard. It is designed to resist a sustained and professional attack at forced entry, using an extended range of hand and performance power tools.

The E10 (SR5) certification gives a significant increase in the level of attack over an Obexion ID D10 industrial door. The addition of an 18V reciprocating saw and an 18V power level for all the electric attack tools that can be resisted, indicates the greater protection that the E10 (SR5) door offers over a D10 (SR4) rated door.

It is typically specified for high-risk commercial buildings, critical infrastructure, government and defence buildings as well as prison, custodial and law enforcement facilities but can also be used for a large range of industrial applications when optional upgrades such as thermal insulation or acoustic insulation materials are included in the specification.

- Stainless steel curtain construction
- Polyester powder coat to any standard RAL / BS colour
- Manual or auto locking
- High or standard duty cycle motors
- Thermal insulation upgrade
- Acoustic insulation upgrade

OBEXION ID E10 INDUSTRIAL DOOR

SUITABLE APPLICATIONS INCLUDE:

- High risk commercial buildings
- Government & Defence
- Critical Infrastructure
- Laboratories

APPROVED DIMENSIONS

Minimum Certified Width: 1750
Maximum Certified Width: 8000
Minimum Certified Height: 1000
Maximum Certified Height: 8000

CURTAIN

Double Wall Stainless Steel

BOTTOM RAIL

Reinforced stainless steel
Weather seal

OPTIONS

- Thermal upgrade available
- Acoustic upgrade available
- High wind resistance upgrade available

FINISH


Finish as delivered.
Polyester powder coated in standard RAL/BS colours available as an added option.

PRODUCT REFERENCE

Obexion ID E10 Industrial Door

PERFORMANCE

Certified to LPS 1175 Issue 8 E10 (SR5)

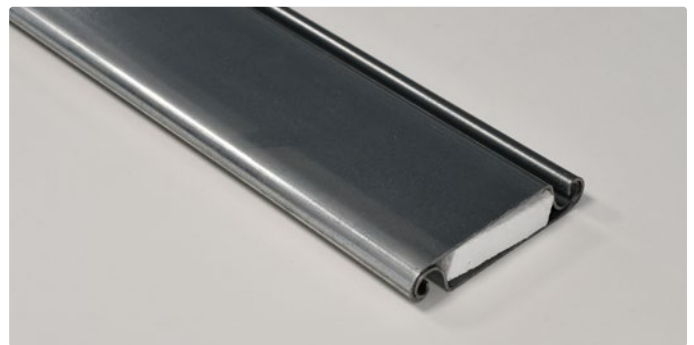

SUITABLE SUBSTRATES:

- Reinforced masonry
- Reinforced concrete
- Structural Steelwork
- Sub assembly steel framework

FRAMES/GUIDES

Two-part galvanised steel guide with rubber seals

OPERATION/LOCKING

Hold-to-run operation with manual locks
Automatic operation with electronic locks
Safety on close as assessment directs

