CHARTER GLOBAL
PROTECTING PEOPLE | SECURING PROPERTY

OBEXION DATA SHEET

OBEXION IDD-10 INDUSTRIAL DOOR



PRODUCT REFERENCE

Obexion IDD-10 Industrial Door

PERFORMANCE

Certified to LPS 1175 Issue 8 D10 (SR4)

CERTIFIED PROTECTION AGAINST:

Forced Entry: Bodily Force

Mitigation of opportunist intruder attempts using manual or bodily force including tools.

Forced Entry: Power Tools

Protecting against deliberate forced entry of premises using mechanically -enhanced power tools.

Forced Entry: Bespoke

Securing people, property and assets against bespoke risks and severe threats.

ACCREDITATIONS

- Independently tested by the Loss Prevention Certification Board (LPCB)
- Certified to LPS 1175 Issue 8 D10 (SR4)
- Secured by Design Police Preferred Specification

The Obexion IDD-10 is an industrial door certified to LPS 1175 Issue 8 D10 (SR4) standard. It is designed to resist a sustained and experienced attempt at forced entry, using an extended range of hand and power tools.

Catering for applications where there is a severe threat to people, property or assets, the Obexion IDD-10 can be used for high-risk commercial buildings, critical infrastructure, government and defence buildings as well as prison, custodial and law enforcement facilities.


Thermal, acoustic and high wind resistance upgrades are available and the Obexion IDD-10 can be fitted with either manual or automatic locking systems.

PRODUCT FEATURES

- Stainless steel curtain construction
- Polyester powder-coated to any standard RAL/BS colour
- Manual or auto-locking
- High or standard duty cycle motors
- Thermal insulation upgrade
- Acoustic insulation upgrade

CHARTER GLOBAL

OBEXION IDD-10 INDUSTRIAL DOOR

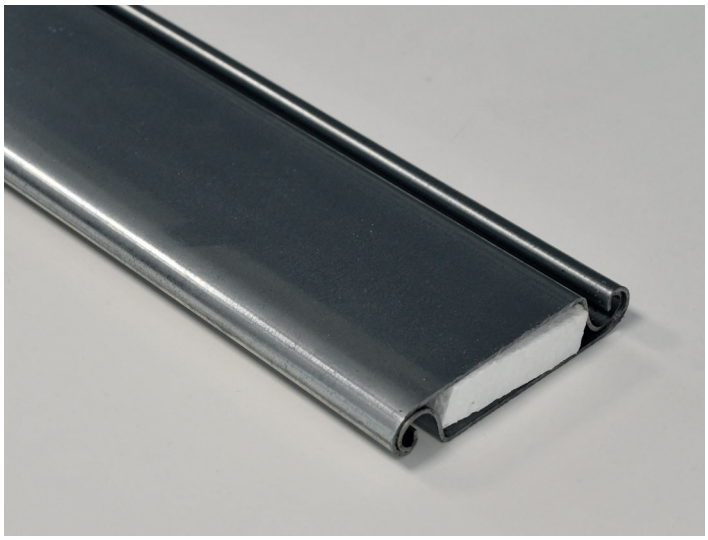

SPECIFICATION DESCRIPTION

High-performance, horizontal roller shutter door with thermal and acoustic features Security rated.

SUITABLE APPLICATIONS INCLUDE:

- High-risk commercial buildings
- Government and defence
- Critical infrastructure
- Laboratories

SUITABLE SUBSTRATES

Certified installation onto:

- Reinforced masonry
- Reinforced concrete
- Structural steelwork
- Sub-assembly steel framework

APPROVED DIMENSIONS

Min certified height: **1.0m**	Min certified width: **1.75m**
Max certified height: **8.0m**	Max certified width: **8.0m**

SHUTTER CURTAIN

- Double Wall Galvanised Steel
- Double Wall Stainless Steel

BOTTOM RAIL

- Reinforced steel
- Weather seal

FRAMES/GUIDES

- Two-part galvanised steel guide with rubber seals

OPERATION/LOCKING

- Hold-to-run operation with manual locks
- Automatic operation with electronic locks
- Safety on close as assessment directs

OPTIONS

- Thermal upgrade available
- Acoustic upgrade available
- High wind-resistance upgrade available

FINISH

- Finish as delivered: Polyester powder-coated in standard RAL/BS colours available as an added option

LPCB UKAS MANAGEMENT SYSTEMS 0007
Assessed to ISO 9001
Cert/LPCB ref: 1075

LPCB
LPS 1175: Issue 8
Cert No. 1075f

Secured by Design
SBD
Official Police Security Initiative

1 Darwin Close, Reading RG2 0TB United Kingdom
+44 (0)845 050 8705 enquiries@charter-global.com **www.charter-global.com**